




Rev. No.	Revision Note	Date	By	Checked
A16	REVISED CAPACITORS	19-NOV-14	AH	YM
A17	REVISED TO PRESSURE PLATE STYLE	29-MAR-2018	CG	BDK

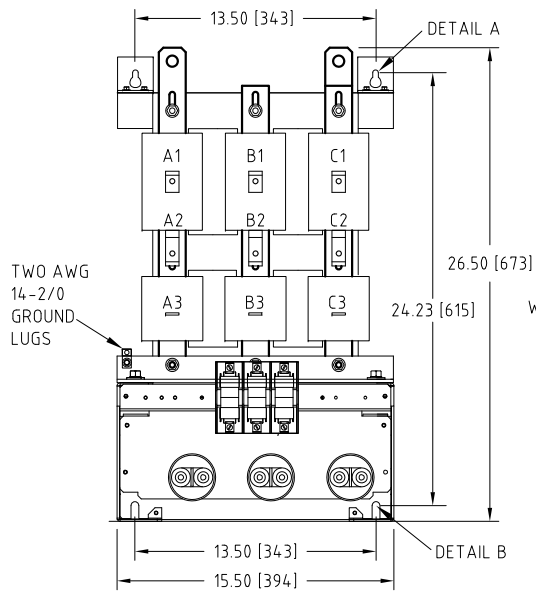


FRONT VIEW

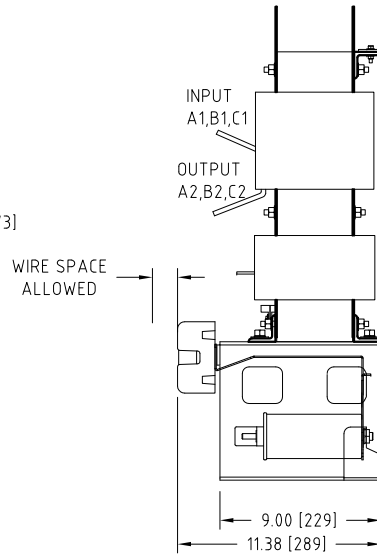

SIDE VIEW

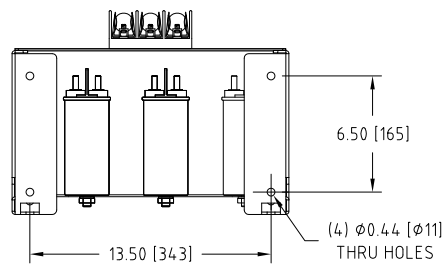


BOTTOM VIEW

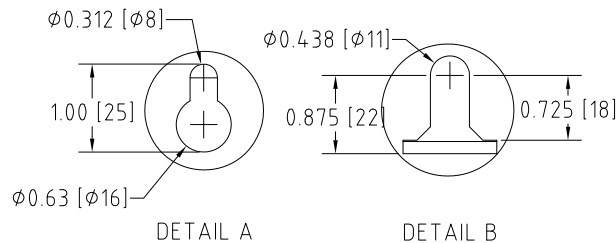


DETAIL A

DETAIL B

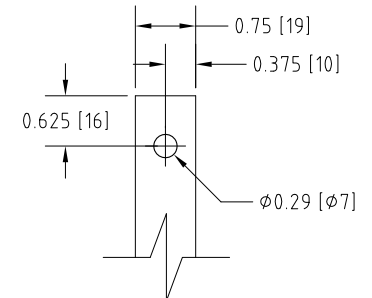

INPUT A1,B1,C1 & OUTPUT A2,B2,C2  
TERMINALS  
THICKNESS 3/16"

### Connection Diagram



UNIT SPECIFICATIONS				INPUT	OUTPUT	APPROX. WT
HP [kW]	PHASE	VOLTS	Hz	AMPS	kW	lb [kg]
100 [75]	3	480	60	113	84	267 [121]

#### NOTES:

- CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES AND OTHER APPLICABLE ELECTRICAL SAFETY AUTHORITIES.
- CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS. ALLOWED AMBIENT: MAXIMUM 60°C, MINIMUM -40°C. A MINIMUM CLEARANCE OF 2" MUST BE ALLOWED ON BOTH RIGHT AND LEFT SIDES. PROPER VENTILATION MUST ENSURE THAT SUPPLY AIR FLOWS THROUGH THE REACTOR COILS FROM BELOW THE UNIT.

## MIRUS International Inc.

31 Sun Pac Boulevard, Brampton, ON, Canada L6S 5P6  
Tel: (905) 494-1120 Fax: (905) 494-1140 Toll Free: 1-888-TO MIRUS

Unless otherwise specified, dimensions are in inches and [mm].	Drawn By EH	Date Created 02-Jun-06	Checked by YM	Approved by - date YM-02-Jun-06	Scale NTS
The information contained herein is the sole property of MIRUS International Inc. Any form of reproduction, distribution and/or disclosure of this information, all or in part, is strictly prohibited without the express written consent of MIRUS International Inc.			Title 100 HP, 480 V, 60 Hz LINEATOR™ AUHF (Panel Mount)		
			Filename AUHF-100-480-60-D-E0P-A17	Revision A17	Sheet 1/1