


Rev. No.	Revision Note	Date	By	Checked
A17	HEIGHT DIMENSION ADJUSTED	01-OCT-15	AH	YM
A18	REVISED BRACKETS	19-MAR-14	AH	YM


**Connection Diagram**

UNIT SPECIFICATIONS				INPUT	OUTPUT	APPROX. WT
HP [kW]	PHASE	VOLTS	Hz	AMPS	kW	lb [kg]
250 [185]	3	480	60	281	209	578 [262]

NOTES:  
 1. Customer is responsible for installation to meet all national and local electrical codes and other applicable electrical safety authorities.  
 2. Type 3R Enclosure requires only front access but minimum 6" clearance should be provided at rear for proper ventilation..



INPUT A1,B1,C1 & OUTPUT A2,B2,C2  
 TERMINALS  
 THICKNESS: 1/4"

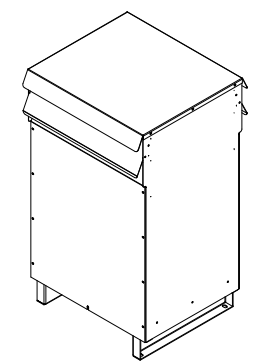

Isometric View

<b>MIRUS International Inc.</b>		31 Sun Pac Boulevard, Brampton, ON, Canada L6S 5P6 Tel: (905) 494-1120 Fax: (905) 494-1140 Toll Free: 1-888-TO MIRUS			
Unless otherwise specified, dimensions are in inches and (mm).	Drawn By YM	Date Created 12-Jan-06	Checked by CG	Approved by - date CG-25-JUN-2019	Scale NTS
The information contained herein is the sole property of MIRUS International Inc. Any form of reproduction, distribution and/or disclosure of this information, all or in part, is strictly prohibited without the express written consent of MIRUS International Inc.		Title 250 HP, 480 V, 60 Hz LINEATOR™ AUHF (Type-3R)			
		Filename AUHF-250-480-60-D-E1-A18	Revision A18	Sheet 1/1	