
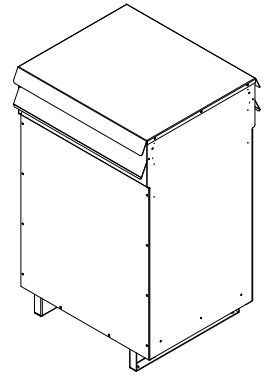


Rev. No.	Revision Note	Date	By	Checked
A13	REVISED CAPACITOR LOCATIONS	17-JUN-2016	CG	YM
A14	REVISED MAGNETIC DESIGN	12-JAN-2021	CG	BDK

Connection Diagram

UNIT SPECIFICATIONS				INPUT	OUTPUT	APPROX. WT
HP [kW]	PHASE	VOLTS	Hz	AMPS	kW	lb [kg]
350 [250]	3	600	60	315	292	875 [397]

NOTES:
 1. Customer is responsible for installation to meet all national and local electrical codes and other applicable electrical safety authorities.
 2. Type 3R Enclosure requires only front access but minimum 6" clearance should be provided at rear for proper ventilation..



Isometric View

MIRUS International Inc.		31 Sun Pac Boulevard, Brampton, ON, Canada L6S 5P6 Tel: (905) 494-1120 Fax: (905) 494-1140 Toll Free: 1-888-TO MIRUS				
		Unless otherwise specified, dimensions are in inches and [mm].	Drawn By CG	Date Created 19-JUN-08	Checked by YM	Approved by - date YM-19-JUN-08
The information contained herein is the sole property of MIRUS International Inc. Any form of reproduction, distribution and/or disclosure of this information, all or in part, is strictly prohibited without the express written consent of MIRUS International Inc.		Title 350HP, 600V, 60Hz LINEATOR™ AUHF (Type-3R)				
		Filename AUHF-350-600-60-D-E1-A14		Revision A14	Sheet 1/1	