


Rev. No.	Revision Note	Date	By	Checked
A13	REVISED CAPACITOR LOCATIONS	17-JUN-2016	CG	YM
A14	REVISED MAGNETIC DESIGN	12-JAN-2021	CG	BDK


### Connection Diagram




UNIT SPECIFICATIONS				INPUT	OUTPUT	APPROX. WT
HP [kW]	PHASE	VOLTS	Hz	AMPS	kW	lb [kg]
350 [250]	3	600	60	315	292	900 [409]

#### NOTES:

- Customer is responsible for installation to meet all national and local electrical codes and other applicable electrical safety authorities.
- Type 3R Enhanced enclosure suitable for outdoor installation. Only front access is required but minimum 6" clearance should be provided at rear for proper ventilation.



Input A1,B1,C1 & Output A2,B2,C2  
 TERMINALS  
 THICKNESS 1/4"

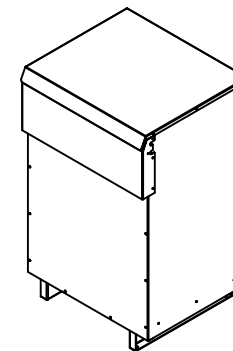

Isometric View

<b>MIRUS International Inc.</b>		31 Sun Pac Boulevard, Brampton, ON, Canada L6S 5P6 Tel:(905) 494-1120 Fax: (905) 494-1140 Toll Free: 1-888-TO MIRUS			
Unless otherwise specified, dimensions are in inches and [mm].	Drawn By CG	Date Created 19-JUN-08	Checked by YM	Approved by - date YM-19-JUN-08	Scale NTS
The information contained herein is the sole property of MIRUS International Inc. Any form of reproduction, distribution and/or disclosure of this information, all or in part, is strictly prohibited without the express written consent of MIRUS International Inc.		Title 350HP, 600V, 60Hz LINEATOR™ AUHF (Type-3R Enh.)			
		Filename AUHF-350-600-60-D-E1E-A14	Revision A14	Sheet 1/1	