




REV	DESCRIPTION	DATE	BY	APP

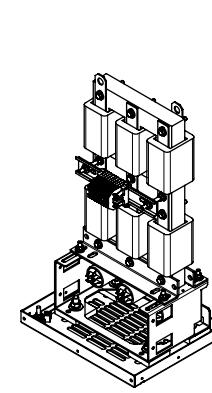

ISOMETRIC VIEW  
(PANELS REMOVED)

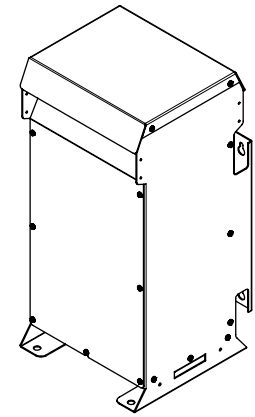

ISOMETRIC VIEW

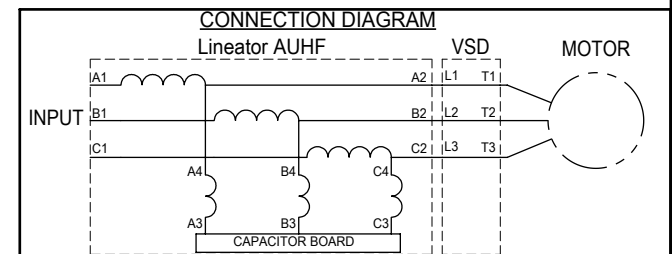

UNIT SPECIFICATIONS				INPUT	OUTPUT	OUTPUT	HEAT LOSS	APPROX. WT
HP [kW]	PHASE	VOLTS	Hz	AMPS	AMPS	kW	W	lbs [kg]
5 [4]	3	600	60	5	5	4.5	59	65 [29]



THE INFORMATION CONTAINED HEREIN IS THE SOLE PROPERTY OF MIRUS INTERNATIONAL INC. ANY FORM OF REPRODUCTION, DISTRIBUTION AND/OR DISCLOSURE OF THIS INFORMATION, ALL OR IN PART, IS STRICTLY PROHIBITED WITHOUT THE EXPRESS WRITTEN CONSENT OF MIRUS INTERNATIONAL INC.

DRAWN	APPROVED
CG	BDK
SCALE	DATE
NTS	15-DEC-2021

**MIRUS** International Inc.  
31 Sun Pac Boulevard, Brampton Ontario Canada L6S 5P6  
1-888-TO MIRUS www.mirusinternational.com

TITLE

5 HP, 600 V, 60Hz  
LINEATOR AUHF, ENCLOSED

ELEC FILE NO.	DRAWING NO.	SHT	REV
AUHF-5-600-60-D-EX-R0	AUHF-5-600-60-D-E-1	OF 1	1 0

NOTES:  
1. CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES AND OTHER APPLICABLE ELECTRICAL SAFETY AUTHORITIES.  
2. TYPE 3R ENCLOSURE REQUIRES ONLY FRONT ACCESS BUT MINIMUM 6" CLEARANCE SHOULD BE PROVIDED AT REAR FOR PROPER VENTILATION.