


Rev. No.	Revision Note	Date	By	Checked
A17	EOP BRACKETS REVISED	04-JUL-2017	CG	BDK
A18	REVISED TO PRESSURE PLATE STYLE	28-MAR-2018	CG	BDK


Connection Diagram




UNIT SPECIFICATIONS				INPUT	OUTPUT	APPROX. WT
HP [kW]	PHASE	VOLTS	Hz	AMPS	kW	lb [kg]
60 [45]	3	480	60	69	51	218 [99]

NOTES:

- Customer is responsible for installation to meet all national and local electrical codes and other applicable electrical safety authorities.
- Type 3R Enclosure requires only front access but minimum 6" clearance should be provided at rear for proper ventilation..

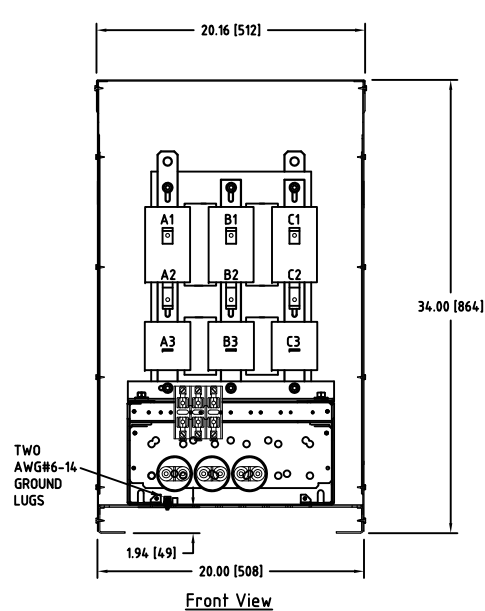


Front View

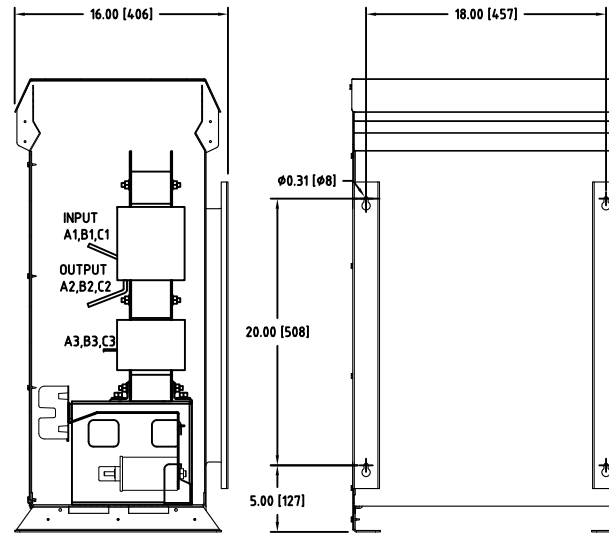


Side View


Back View

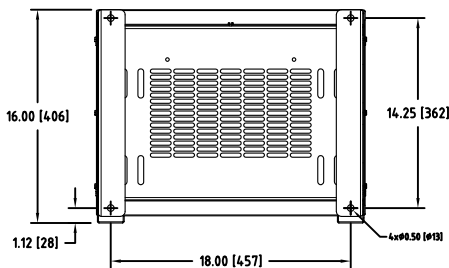

Bottom View



Input A1,B1,C1 & Output A2,B2,C2
TERMINALS
THICKNESS 1/8"

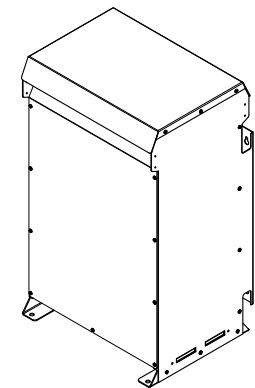

Isometric View

MIRUS International Inc.		31 Sun Pac Boulevard, Brampton, ON, Canada L6S 5P6 Tel:(905) 494-1120 Fax: (905) 494-1140 Toll Free: 1-888-TO MIRUS			
Unless otherwise specified, dimensions are in inches and [mm].	Drawn By JH	Date Created 25-Oct-05	Checked By YM	Approved by - date YM-25-Oct-05	Scale NTS
The information contained herein is the sole property of MIRUS International Inc. Any form of reproduction, distribution and/or disclosure of this information, all or in part, is strictly prohibited without the express written consent of MIRUS International Inc.		Title 60 HP, 480 V, 60 Hz LINEATOR™ AUHF (Type-3R)			
		Filename AUHF-60-480-60-D-E1-A18	Revision A18	Sheet 1/1	